

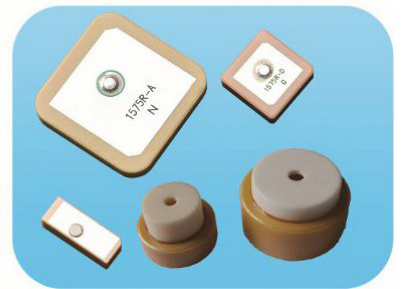


AIS Antenna

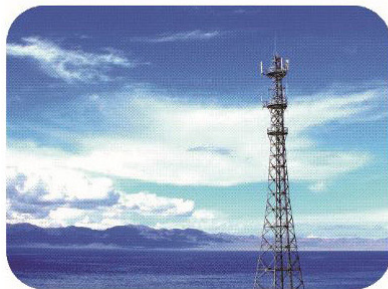

6. AIS Antenna

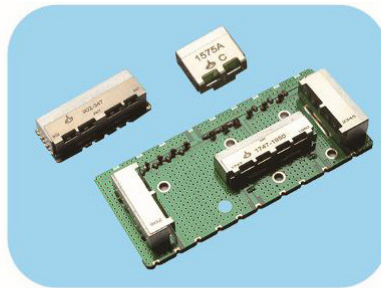

AIS Antenna

MFV-4-PF



MFV-4-SO



MFV-4-PS



VHF

General Specification	VHF
Mounting type	RV-V or RM-1 mount
Dimension	D: 1 inch, H: 51.5 inch
Operation temperature	-40 to 85 C
Water Proof	IP67
Electrical Data	VHF
Working Frequency	133 MHz
Gain	4 dB
Noise Figure	
VSWR	2.0 Max.
Input Voltage	
Axial Ratio	
Polarization	Linear
Impedance	50 Ohm
Power Consumption	

General Specification	VHF
Mounting type	L Bracket mount
Dimension	D: 1 inch, H: 51.5 inch
Operation temperature	-40 to 85 C
Water Proof	IP67
Electrical Data	VHF
Working Frequency	133 MHz
Gain	4 dB
Noise Figure	
VSWR	2.0 Max.
Input Voltage	
Axial Ratio	
Polarization	Linear
Impedance	50 Ohm
Power Consumption	

General Specification	VHF
Mounting type	L Bracket mount
Dimension	D: 1 inch, H: 51.5 inch
Operation temperature	-40 to 85 C
Water Proof	IP67
Electrical Data	VHF
Working Frequency	133 MHz
Gain	4 dB
Noise Figure	
VSWR	2.0 Max.
Input Voltage	
Axial Ratio	
Polarization	Linear
Impedance	50 Ohm
Power Consumption	

AIS Antenna

AVG-70



RV-V & RM-1



L -Bracket



VHF + GPS

General Specification	VHF + GPS
Mounting type	RV-V or RM-1 mount
Dimension	780 mm
Operation temperature	-40 to 85 C

Electrical Data	VHF+ GPS
Working Frequency	133 MHz & 1575.42 MHz
Gain	4 dBi / GPS 28 db
Noise Figure	
VSWR	2.0 Max.
Input Voltage	
Axial Ratio	
Polarization	Linear
Impedance	50 Ohm
Power Consumption	

General Specification	GPS L1/L2
Mounting type	RV-V & RM-1 mount
Dimension	
Operation temperature	-40 to 85 C

General Specification	
Mounting type	L-Bracket mount
Dimension	
Operation temperature	-40 to 85 C