
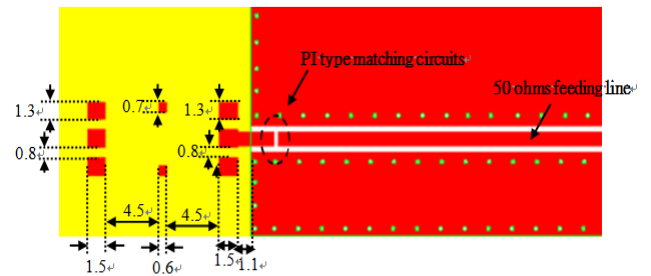



Specification

| | |
|--------------------|------------------|
| Frequency Range | 880MHz~960MHz |
| V. S. W. R | ≤2.0 |
| Impedance | 50Ω |
| Gain | -0.84dBi |
| Azimuth | Omni-directional |
| Polarization | Linear |
| Impedance | 50 Ω |
| Azimuth Beam width | Omni-directional |

Dimension (mm)

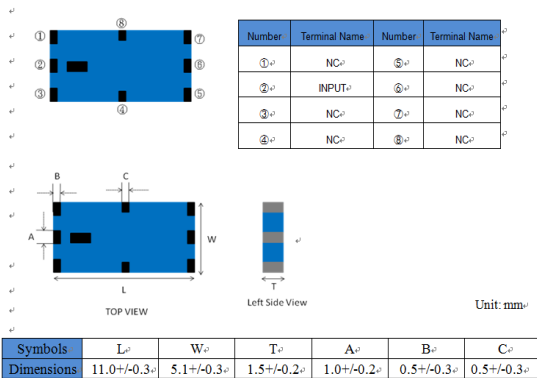

Performance

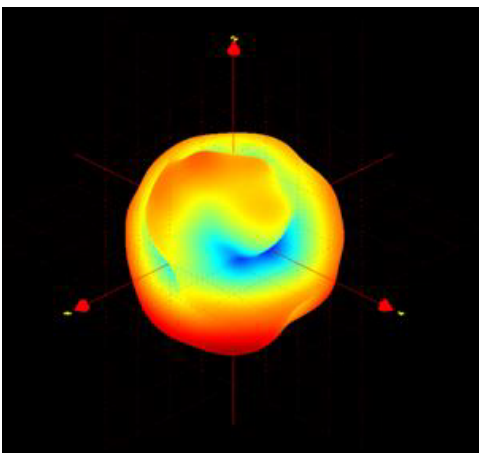

Test Graph

