
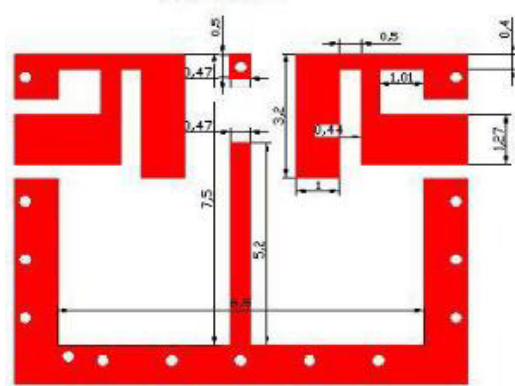



Specification

Frequency Range	1565MHz~1585MHz/2400MHz ~ 2500MHz
V. S. W. R	≤2.0
Impedance	50Ω
Gain	1.21dBi /3.18dBi
Azimuth	Omni-directional
Polarization	Linear
Impedance	50 Ω
Azimuth Beam width	Omni-directional

Dimension (mm)

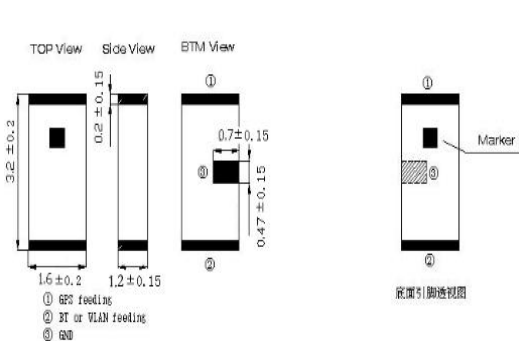

Performance

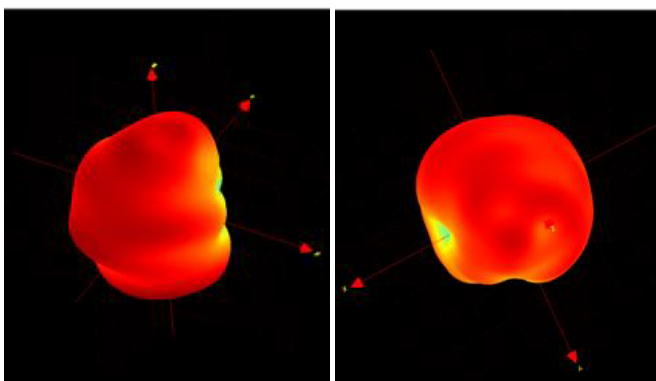

1575MHz

2450MHz

Test Graph

