
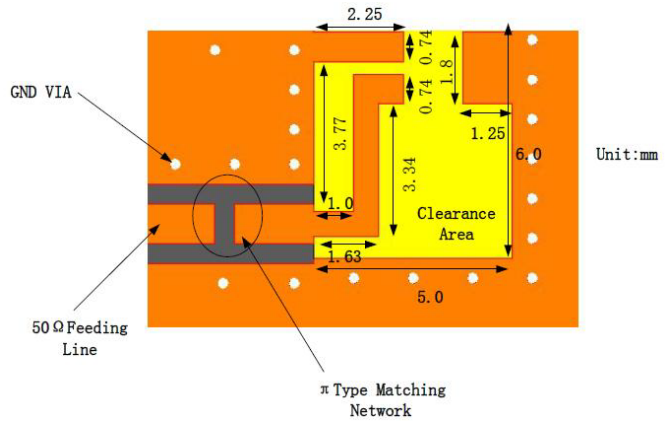



Specification

Frequency Range	2400MHz~2500MHz
V. S. W. R	≤2.0
Impedance	50Ω
Gain	5.54dBi
Azimuth	Omni-directional
Polarization	Linear
Impedance	50 Ω
Azimuth Beam width	Omni-directional

Dimension ( mm )

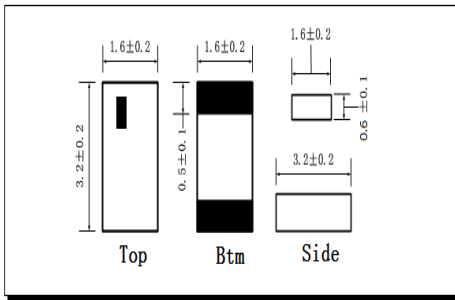

Performance

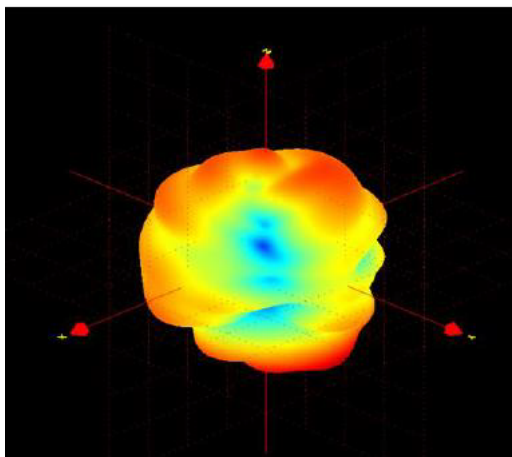

Test Graph

