



Specification

Frequency Range	2400MHz~2500MHz
V. S. W. R	≤2.0
Impedance	50Ω
Gain	3.84dBi
Azimuth	Omni-directional
Polarization	Linear
Impedance	50 Ω
Azimuth Beam width	Omni-directional

Dimension (mm)

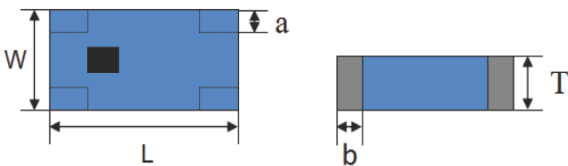

L: 3.2 +/- 0.2
W: 1.6 +/- 0.2
T: 1.2 +/- 0.2
a: 0.3 +/- 0.2
b: 0.5 +/- 0.2

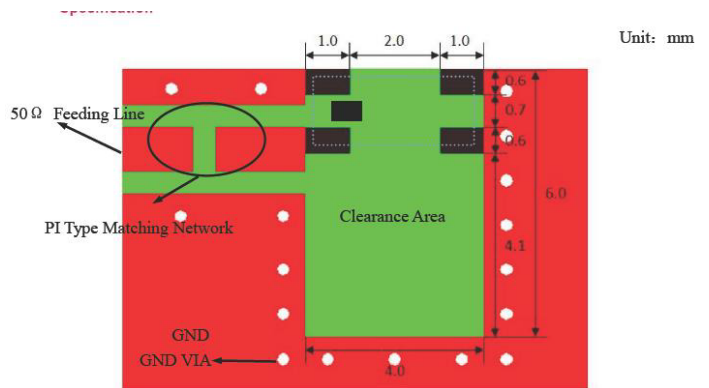

Performance

Test Graph

