
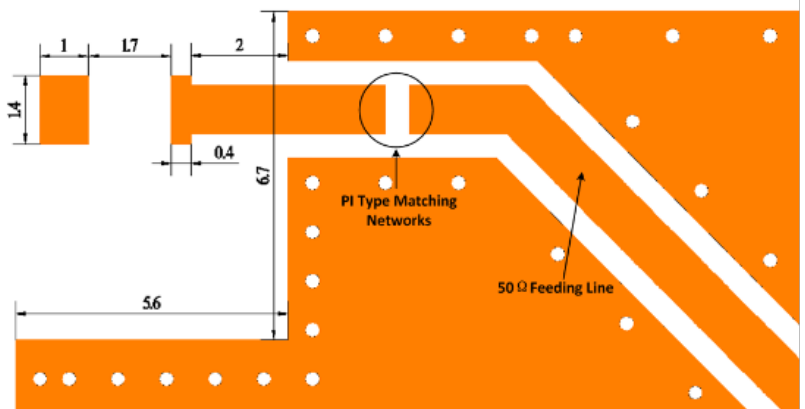



Specification

|                    |                  |
|--------------------|------------------|
| Frequency Range    | 2410MHz~2490MHz  |
| V. S. W. R         | ≤2.0             |
| Impedance          | 50Ω              |
| Gain               | 2.96dBi          |
| Azimuth            | Omni-directional |
| Polarization       | Linear           |
| Impedance          | 50 Ω             |
| Azimuth Beam width | Omni-directional |

Dimension ( mm )

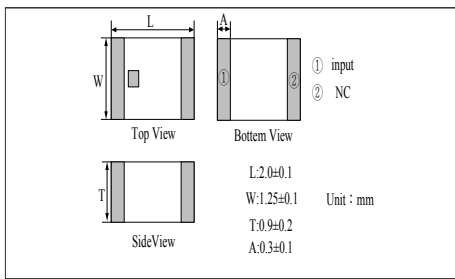

Performance

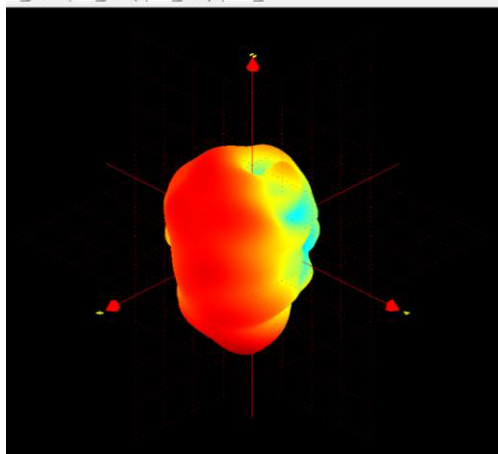

Test Graph

