


**Specification**

Center Frequency[fo]	875MHz
Bandwidth[BW]	±5MHz
Insertion Loss in BW	3dB max.
Ripple in BW	1.0 dB max.
Return Loss in BW	15.0 dB min.
Attenuation [Absolute Value]	7min.@887MHz
In/Out Impedance	50Ω
Input Power	1 w max.
Operation Temperature	-40°C ~ +85 °C

**Dimension (mm)**

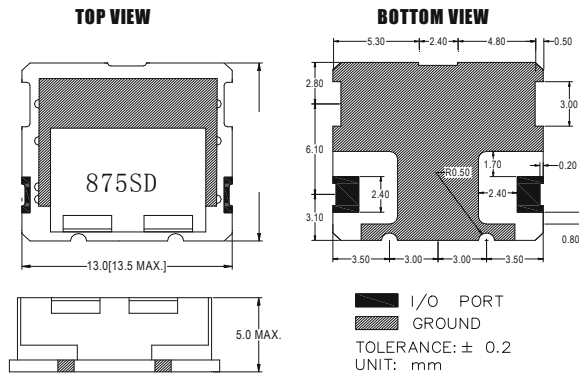

**TEST GRAPH**

