


**Specification**

Center Frequency[fo]	1900.0MHz
Bandwidth[BW]	±20.0MHz
Insertion Loss in BW	3.0dB max.
Ripple in BW	1.0dB max.
VSWR in BW	1.5: 1
Attenuation [Absolute Value]	30.0 min.@fo±60MHz 40.0 min.@2010~2025MHz
In/Out Impedance	50Ω
Input Power	1w max.
Operation Temperature	-40°C ~ +85 °C

**Dimension (mm)**

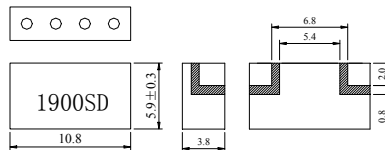

TOLERANCE:±0.1      UNIT:mm

**TEST GRAPH**

