


**Specification**

Center Frequency[fo]	5240.0MHz
Bandwidth[BW]	±100MHz
Insertion Loss in BW	1.5 dB max.
Ripple in BW	1.0 dB max.
VSWR in BW	1.9:1max.
Attenuation [Absolute Value]	30.0 min.@ 2400 to 2700 MHz 21.0 min.@ 5480 to 5860 MHz
In/Out Impedance	50Ω
Input Power	1 w max.
Operation Temperature	-40°C ~ +85 °C

**Dimension (mm)**

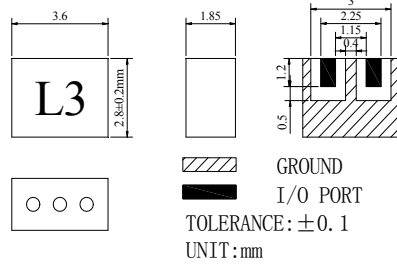

**TEST GRAPH**

