


**Specification**

Center Frequency[fo]	5245.0MHz
Bandwidth[BW]	±95MHz
Insertion Loss in BW	3.0 dB max.
Ripple in BW	1.2 dB max.
VSWR in BW	1.9:1max.
Attenuation [Absolute Value]	30.0 min @ 2400 to 2500 MHz 25.0 min @ 5480 to 5550 MHz 30.0 min @ 5550 to 5900 MHz
In/Out Impedance	50Ω
Input Power	1 w max.
Operation Temperature	-40°C ~ +85 °C

**Dimension (mm)**

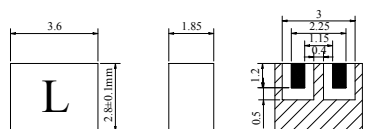

TOLERANCE: ±0.10      UNIT:mm

**TEST GRAPH**

