GSC-Tech Corp.
Microwave Group

Dielectric Band Pass filter

DFB5662

Specification	
Center Frequency[fo]	5662.5MHz
Bandwidth[BW]	±172.5MHz
Insertion Loss in BW	2.3 dB max.
Ripple in BW	1.0 dB max.
VSWR in BW	1.67:1max.
Attenuation [Absolute Value]	40.0 min.@ 5170 to 5330 MHz
In/Out Impedance	50Ω
Input Power	1 w max.
Operation Temperature	-40℃ ~ +85 ℃

Dimension（mm）

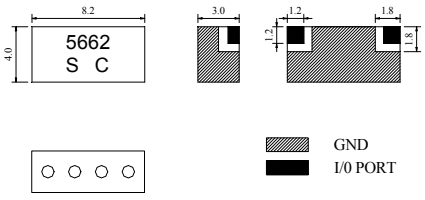

TOLERANCE:±0.2 UNIT:mm
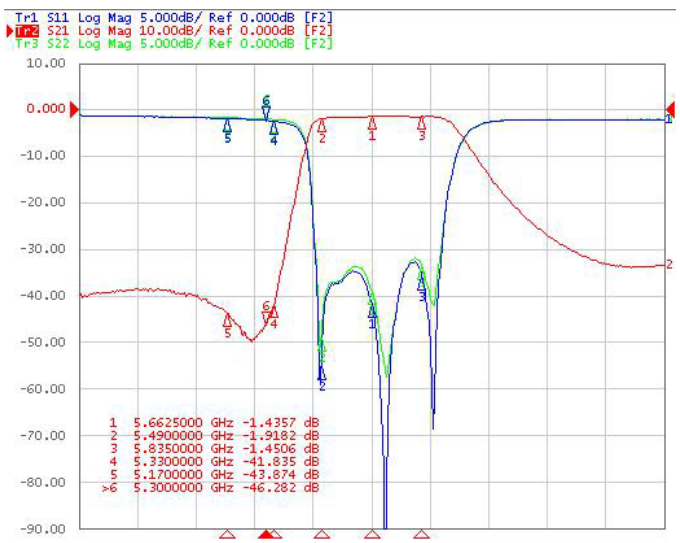
TEST GRAPH